


# Onyx Unvented Indirect.

## Technical Specification.

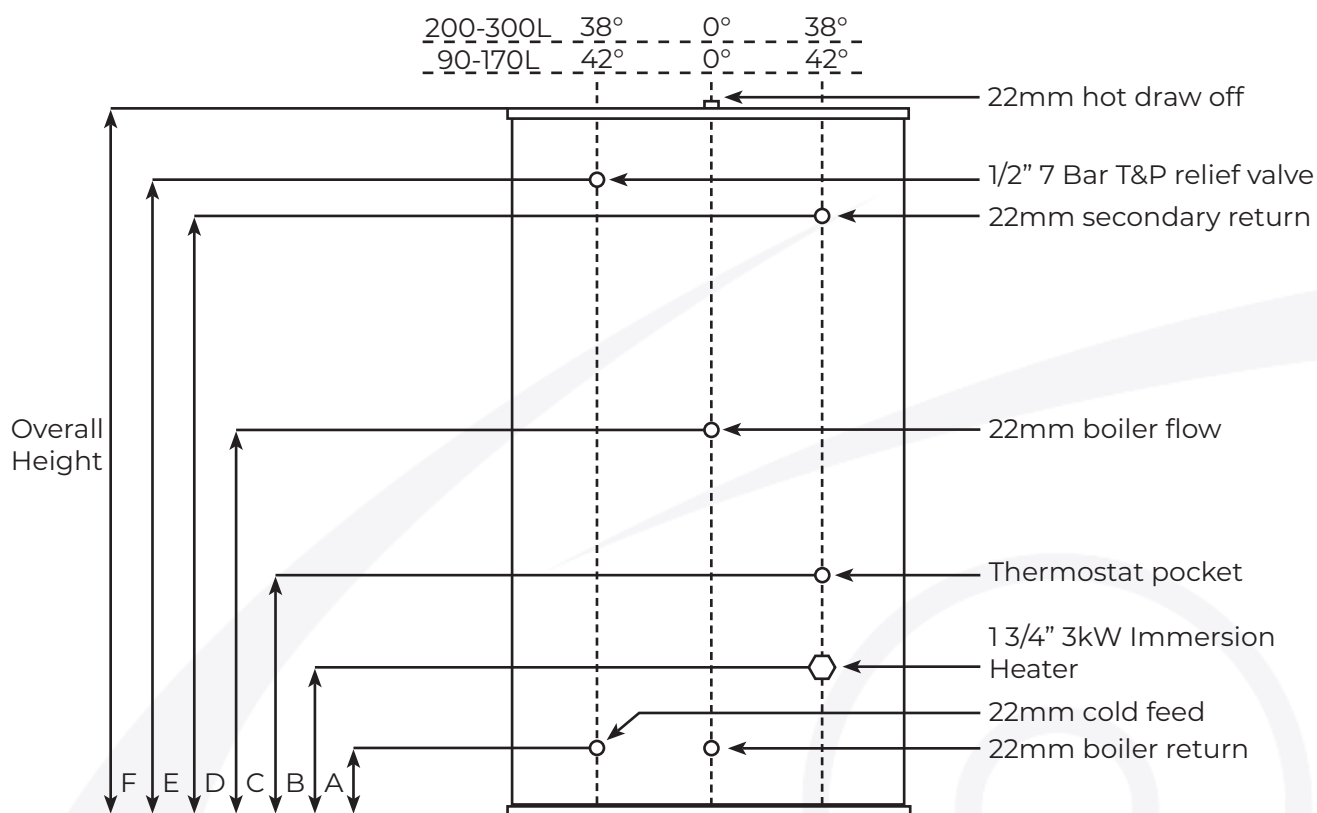

Product Code	ONXI090	ONXI125	ONXI150	ONXI170	ONXI200	ONXI250	ONXI300
<b>Capacity (L)</b>	90	125	150	170	200	250	300
<b>Height (mm)</b>	750	870	1060	1200	1150	1500	1750
<b>Diameter (mm)</b>	510	510	510	510	580	580	580
<b>A (mm)</b>	171	171	171	171	193	193	193
<b>B (mm)</b>	201	201	201	201	223	223	223
<b>C (mm)</b>	401	401	401	451	473	553	553
<b>D (mm)</b>	497	497	497	601	623	843	843
<b>E (mm)</b>	-	-	-	-	813	973	1253
<b>F (mm)</b>	551	671	876	1026	928	1293	1543
<b>Empty Weight (kg)</b>	32	35	38	42	46	55	61
<b>Full Weight (kg)</b>	121	156	187	210	240	301	355
<b>Standing Heat Loss (kWh/24h)</b>	1.59	1.64	1.85	1.97	1.85	2.00	2.22
<b>Reheat time (mins) (10°C - 60°C)</b>	26	36	37	36	33	35	40
<b>Standing loss (W)</b>	66	68	77	82	77	83	92
<b>Energy efficiency class</b>	C	C	C	C	C	C	C
<b>Operating pressure (bar)</b>	3	3	3	3	3	3	3
<b>Max incoming supply (bar)</b>	12	12	12	12	12	12	12

# Onyx Unvented Indirect.

Features and Benefits.

- **Manufactured in Britain**
- **25 year cylinder warranty**
- **2 year warranty on parts**
- **22MM Compression fittings included**
- **Available from 90-300L**
- **Next day availability**
- **WRAS Approved**
- **G3 unvented kit supplied**
- **White cased finish**



The Onyx Indirect cylinder features an internal coil and is designed for use with a gas, oil or biomass boiler as a main source of heat. Also supplied with a 3kW immersion to provide back up heat.

Manufactured in the UK to the highest standards, the Onyx Indirect cylinder is made with premium Duplex stainless ensuring corrosion resistance and long term durability. Ideal for a wide range of domestic and light commercial properties it offers a quick reheat time and generous hot water delivery making it the right choice for many projects.

*Supplied with: Pressure Reducing Valve, Expansion Vessel, 2 Port Valve, Dual Control Stat Temperature and Pressure relief valve (factory fitted), Tundish, Immersion Heater.*

