UFH00402 Thermal Actuator

Installation Instructions

For use in normal environments.

CAUTION! Do not use if cable is defective.


- Disconnect the power supply from any defective appliances.
- Factory setting is (NC) Normally Closed.
- Guidelines for the electrician; Level of contamination 2.
- When changing from normally closed to normally open, live components are exposed. Therefore, disconnect the power when changing.




Important:
Keep this document

UK CA CE


1




2




Power supply:	230V ~
Auxiliary contact rating:	3(0.5)A
Closing force:	90 ~ 125N
Running time:	4.5 minutes
Power Consumption:	2.5W
Stroke:	4.0m
Start up current:	150mA




3




4

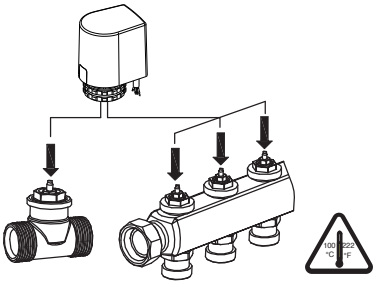

5



6



Blue = Neutral
Brown = 230Vac
Black = Auxiliary Switch

Polypipe

Want More Information?
Call our telephone support team on: 01709 772200
Or view technical specifications directly on our website:
www.polypipeufh.com

Polypipe Building Products
Broomhouse Lane
Edlington Doncaster
DN12 1ES